

Installation Guide CobraCrane II Extension Kit II

Prepared: July 1, 2008



212 Regency Crest
Maria Luisa Park
Banilad, Cebu City, Cebu 6000
63 32 344 3214
sales@steadytracker.com
www.steadytracker.com

Extension Kit II Installation Guide

Getting Started

The Extension Kit II is shipped from the factory in the most secure packaging available. Please inspect the contents of the package and make sure to call us at 63 32 344 3214, or email to sales@steadytracker.com if you find any shipping damage or missing components.

The CobraCrane Extension Kit II should include:

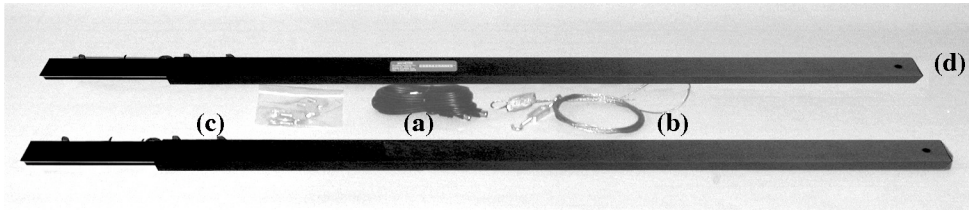


Figure (1)
(a) RCA Cable
(b) Pulley Cable Extension
(c) Spare Thumb Screws
(d) Extension

Packing Material

Please store all original containers. The Steadytracker Company will not take responsibility for any products shipped to The Steadytracker Company without the original shipping material. We have engineered a full damage proof package for the Ext Kit II and without this package your unit may be damaged when shipped using any freight company. Please make sure to keep the packaging safe for future use.

Setup instructions

Step 1 - Figure (2) - Remove Pulley Cable

Remove the pulley cable from the CobraCrane II by turning and loosening the turnbuckle.

Figure (2)





Figure (3)



Step 2 - Remove and Replace Tripod Mount - Figure (3)

Remove tripod mount from the CobraCrane II and replace it in the next hole forward, towards the camcorder mount.

Step 3 - Remove Camcorder Mount - Figure (4)

Remove the camcorder mount from the CobraCrane II and set aside.




Figure (4)




Figure (5)

Step 4 - Add Extension - Figure (5)(6)

Remove all thumb screws from extension and then slide extension into the end of the CobraCrane II Figure (5). Tighten thumb screw Figure (6). Tighten carefully, do not over-tighten.




Figure (6)




Figure (7)

Step 5 - Remount Camcorder Mount- Figure (7)

Remount the camcorder mount to the end of the extension. Sandwich the bearings between the two gold washers, use the two large silver washers against the black metal bar. Tighten the lock-nut, but not too tight. The bracket should rotate freely without much friction, but does not wobble, or have any play sideways. do not over-tighten or deform the black metal bar.




Figure (8)

Step 6 - Replace Pulley Cable - Figure (8)

Attach longer pulley cable (1b) around pulleys. First tighten cable by pulling on excess wire near the gripple. Final stage tightening is done by rotating the turnbuckle. If the wire is too loose, the pulleys will slip, too tight it will break. Pluck the cable, It should sound similar to the low string of a guitar. If you need to reposition the "GRIPPLE" use the supplied "PIN". Push the pin into the small hole above the wire to release.

Obtaining a Return Merchandise Authorization Number:

In a continuing effort to provide our customers with the best service and shortest turnaround time possible, we have initiated a Return Merchandise Authorization (RMA) Policy. It is our policy that all material and repair returns, whether in warranty or not, are only accepted if an RMA number has been issued for the products being returned. Any unauthorized returns will be returned, unrepaired, to the customer at the customer's expense.

The Conditions of The Warranty are as Follows:

The Steadytracker Company reserves the right to determine if a repair is subject to the warranty agreement. Damage caused by products being dropped or mishandled is not covered by the warranty. Suitable packaging may be purchased from The Steadytracker Company at a nominal cost. All products are to be shipped prepaid to The Steadytracker Company. For insurance reasons, The Steadytracker Company cannot accept any product that is returned via the U.S. Postal Service. Returns will be accepted from UPS, Federal Express, or a comparable freight carrier. The Steadytracker Company will return the repaired product via a like carrier, in the continental United States, only if the product is under warranty and subsequently found to be faulty. Out-of-warranty repaired products are shipped at the customer's expense. Turnaround time for warranty repairs will not exceed 4 days (not including shipping time), unless extraordinary fault conditions exist.

Limited Warranty:

Labor and defects are covered for one (1) year from the original date of purchase.

Only the original purchaser of the product is covered under this warranty. The warranty is not transferable. If you discover a defect, please refer to our Return Merchandise Authority Policy. The Warranty covers all SteadyTracker hardware defective in materials or workmanship. During this warranty period, The Steadytracker Company, at its option, will repair or replace product or product components, which in its opinion prove defective. Parts and components used in the repair process may be recycled or repaired, at The Steadytracker Company's discretion. This warranty service will be performed at no charge to the registered owner, provided the product is shipped prepaid to The Steadytracker Company. The Steadytracker Company will return the repaired product via a like carrier, in the continental United States within 4 days shipping time excluded. The Steadytracker Company reserves the right to determine whether a needed repair is subject to the warranty as per its provisions stated herein. Transit damage caused by inadequate packing invalidates this warranty. This warranty will be void if, in the opinion of The Steadytracker Company, the product in question has been damaged through accident, misuse, misapplication, or as a result of service or modification performed not authorized in writing by The Steadytracker Company.

Return Merchandise Authority Policy:

Damaged or defective Steadytracker Company products that are purchased from The Steadytracker Company may be returned for replacement only. The Steadytracker Company, will not accept returns for any other reason. All eligible returns require a Return Merchandise Authorization (RMA) number. EMAIL sales@steadytracker.com or call 63 32 344 3214 to obtain an RMA number. Items must be returned within 10 days of receiving your RMA number. Returned product must be in its original packaging with all contents included and must have the RMA number clearly marked on the outside of the package. Please be sure to include the Product Registration Card. Incomplete or unauthorized returns will be refused. RMA numbers and the address to return product may be obtained from The Steadytracker Company by emailing sales@steadytracker.com.